



200Ah to 350Ah



## Power That Keeps You Moving Durable, Reliable & Unstoppable

Tall Tubular Batteries For Inverter & Solar

CHARGE  
YOUR  
TOMORROW

**INTERLIGHT®**

NO  
INTERNAL  
PACKING

LOW  
MAINTENANCE

FASTER  
RECHARGE

SUPERIOR  
VOLTAGE

PATENTED CONTAINER  
287292, 287295

PARTIAL STATE OF  
CHARGE CONDITION

LONGER  
LIFE

INCREASED  
BACK-UP

MEETS IEC 61427-1 SPECIFICATIONS

Note: Color of the product may vary from the original color in this document.

This catalogue is issued to provide outline information only and is not deemed to form part of an offer or contract. Our policy is one of continued improvement and we reserve the right to change details without prior notice.

## Features

- Special Selenium alloy grid, casted at high pressure by pressure dye casting machine (PDC) for void free structure to provide longer life.
- 99.99% pure active material with finest quality red lead.
- Extra strong, flexible oxidation-resistant gauntlet for higher performance.
- Special Thick P.E separators are used to increase the efficiency & life.

## Benefits

- Long design life
- Very low maintenance
- Can handle extreme weather conditions
- Rugged Performance
- Longer life without charging

## TECHNICAL DATA

### TALL TUBULAR BATTERIES

Type of Battery	Nominal Voltage	Capacity@C20 at 27°C	Dimensions mm (LxWxH)+/-3mm	Gross Battery weight+/-3% [Kg]	Battery Layout
IL200DTT	12	200	473X190X445	62	-□□□□-
IL250DTT	12	250	473X190X445	63	-□□□□-
IL350DTT	12	350	506X190X479	78	-□□□□-



Range available: 200Ah to 350Ah

### Electrical Parameters & Charging Profile


Battery Specified Capacity Test @ 27°C					
MODEL	C20 @ 10.5V	C10 @ 10.5V	C5 @ 10.5V	C3 @ 10.5V	C1 @ 10.5V
IL200DTT (12 V 200AH @ C20)	200	170	150	130	100
IL250DTT (12 V 250AH @ C20)	250	220	185	162	125
IL350DTT (12 V 350AH @ C20)	350	308	260	225	175

Ah & Wh Efficiency			
Ah Efficiency	>90%	Wh Efficiency	>75%

- **Poly Components Material:** Polypropylene Co polymer
- **Watering system :** Individual to every cell in Monobloc
- **Color :** Blue
- **Testing Parameters :** IS 13369:1992 & IEC 61427

Charging Profile

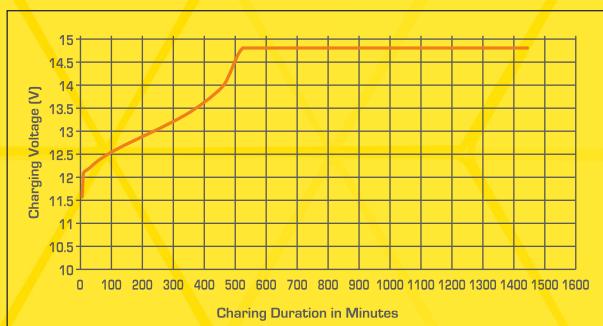


Self Discharge Characteristics @ Different Temperature




State of Charge Measure of Open-circuit Voltage @ 27°C

State of Charge	Specific Gravity	Voltage
100%	1.240±10	12.55V-12.70V
75%	1.125±10	≤12.4V
50%	1.200±10	≤12.1V
25%	1.175±10	≤12.0V
0%	1.150±10	11.8V


Service (Float) Life and Temperature

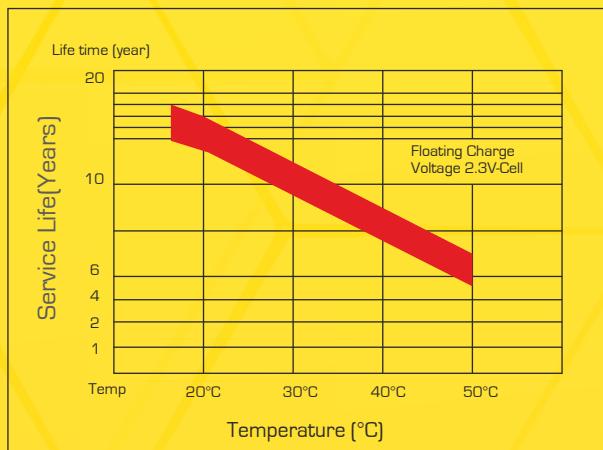

Discharging Characteristics at various rates @ 27°C

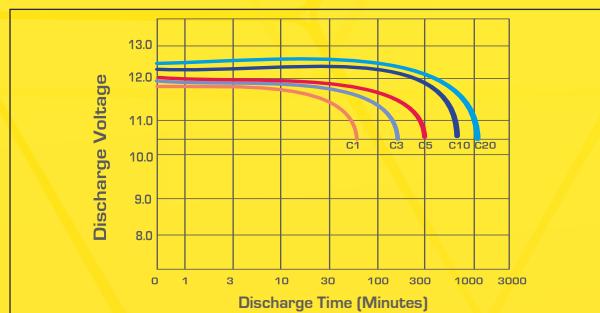

Expected Capacity vs Temperature

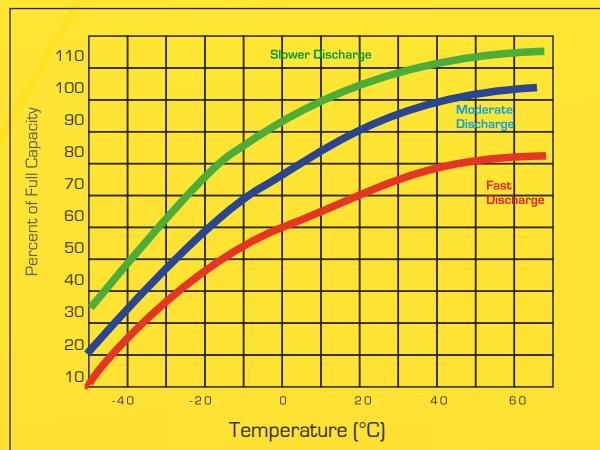


Interlight Battery Manufacturing Certified by



**Specific Gravity & Self Discharge w.r.t. Temperature**

	Add	Subtract
CHARGING TEMPERATURE COMPENSATION	0.005 volt per cell for every 1°C below 25°C 0.0028 volt per cell for every 1°F below 77°F	0.005 volt per cell for every 1°C above 25°C or 0.0028 volt per cell for every 1°F above 77°F
OPERATIONAL DATA	Operating Temperature -4°F to 131°F (-20°C to +55°C) At temperatures below 32°F (0°C) maintain a state of charge greater than 60%.	Self Discharge As per discharge Graph

**Expected Life**

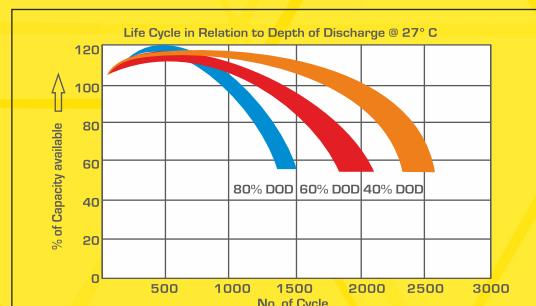

**Charging Instructions**

Charger Voltage Settings (at 77°F / 25°C)			
System Voltage	12V	24V	48V
Maximum Charge Current	0.2010		
Maximum Absorption Phase Time (hours)	4		
Absorption Voltage	14.4	28.8	57.6
Float Voltage	13.6	27.2	54.4
Equalization Voltage	16	32	64
Do not install or charge batteries in a sealer or non-ventilated compartment. Constant under or overcharging will damage the battery and shorten its life as with any battery.			
Periodic Charge	Provide a periodic freshening charge to maintain a SOC greater than the threshold of 70%		

**Terminal Configuration**

**Terminal Type :** L

**Terminal Height :** 26.5 mm

**Terminal Width :** 25.7 mm

**Terminal Length :** 42 mm

**Bolt Type :** M8




**Float Type**

Locking Float indicator cum watering lid for each cell



**Recycle Responsibly**



© 2023 Interlight Technologies Private Limited. All rights reserved. Interlight Technologies Private Limited is not liable for damages that may result from any information provided in or omitted from this publication, under any circumstances. Interlight Technologies Private Limited reserves the right to make adjustments to this publication at any time, without notice or obligation.



Meets IEC 61427-1  
Specifications

**INTERLIGHT TECHNOLOGIES PRIVATE LIMITED**  
Khasra Number 6295/1795/2 Abadi Freedom Nagar Sant Avenue Vakia  
Rakba Sultanwind, Amritsar, Amritsar, Punjab, India, 143001  
+91-7087694631 | sales@interlightglobal.com



ITPL/2025/DS/B/705

For more information or questions, please visit **WWW.INTERLIGHTGLOBAL.COM**

©2022 INTERLIGHT TECHNOLOGIES PRIVATE LIMITED. All Rights Reserved.